

AVG-STD/AVG-MM Powered Valve Guide Driver

GOODSON

Tools and Supplies for Engine Builders
156 Galewski Drive • P.O. Box 847 • Winona, MN 55987-0847
Toll-Free 1-800-533-8010 • Local 507-452-1830 • www.goodson.com

AVG-STD AVG-MM

**Please read instructions
before using.**

© 2005 Goodson Shop Supplies

Instructions

1. Standardize the correct installed height on one guide then repeat it on all others
2. Replaceable screw-in pilots
3. 6½" overall length
4. 4140 CRS heat treated to 40-45 Rc
5. Lock nut AVG-2 is tightened to prevent installation sleeve movement.

Parts List

Standard Valve Guide Driver Kit

Order No. AVG-STD

Includes:

- 1-Pneumatic Body Only 5/8"-18 thread (AVG-1)
- 1- Installation Sleeve .710" ID (AVG-3)
- 1-Locking Nut (AVG-2)
- 4-Replaceable Pilots:
(.312", .343", .372, .437")


Metric Valve Guide Driver Kit

Order No. AVG-MM

Includes:

- 1-Pneumatic Body Only 5/8"-18 thread (AVG-1)
- 1- Installation Sleeve .710" ID (AVG-3)
- 1-Locking Nut (AVG-2)
- 4-Replaceable Pilots:
(5.0mm, 6.0mm, 7.0mm, 8.0mm)

WARNING: Use Loc-Tite to prevent pilot adaptor from loosening (pilots only)

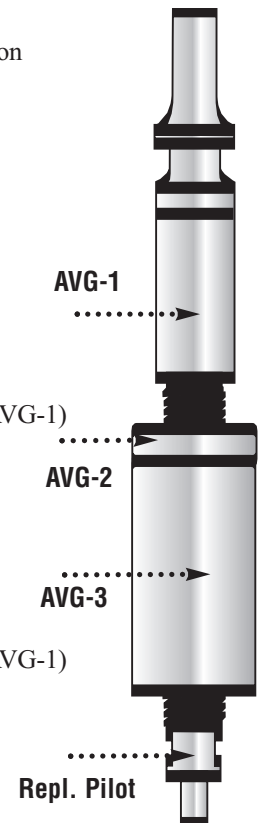

AVG-STD/AVG-MM Powered Valve Guide Driver

GOODSON

Tools and Supplies for Engine Builders
156 Galewski Drive • P.O. Box 847 • Winona, MN 55987-0847
Toll-Free 1-800-533-8010 • Local 507-452-1830 • www.goodson.com

AVG-STD AVG-MM

**Please read instructions
before using.**

© 2005 Goodson Shop Supplies

Instructions

1. Standardize the correct installed height on one guide then repeat it on all others
2. Replaceable screw-in pilots
3. 6½" overall length
4. 4140 CRS heat treated to 40-45 Rc
5. Lock nut AVG-2 is tightened to prevent installation sleeve movement.

Parts List

Standard Valve Guide Driver Kit

Order No. AVG-STD

Includes:

- 1-Pneumatic Body Only 5/8"-18 thread (AVG-1)
- 1- Installation Sleeve .710" ID (AVG-3)
- 1-Locking Nut (AVG-2)
- 4-Replaceable Pilots:
(.312", .343", .372, .437")

Metric Valve Guide Driver Kit

Order No. AVG-MM

Includes:

- 1-Pneumatic Body Only 5/8"-18 thread (AVG-1)
- 1- Installation Sleeve .710" ID (AVG-3)
- 1-Locking Nut (AVG-2)
- 4-Replaceable Pilots:
(5.0mm, 6.0mm, 7.0mm, 8.0mm)

WARNING: Use Loc-Tite to prevent pilot adaptor from loosening (pilots only)

